


Cleaning the Air Filter

When you turn on your projector, eventually you will receive a message that states to clean your air filter and reset your filter timer. Please follow the directions below when this happens.




1. Turn your projector off and then turn it upside down.
2. Remove the bottom panel.

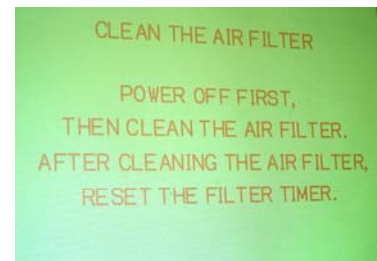


Cleaning the air filter prolongs the projector's lamp life.

The cost for replacing the lamp on the CPS335 Hitachi projector is **\$386**.
Price Quote for 2006-07

3. Remove the filter. **Take the filter to the computer lab to vacuum with a small hand vacuum.**



4. In the lab use the small electric Dirt Devil vacuum to clean the filter. At JLE: The vacuum is located on the small cart in Rm. 3 (old lab). At SW: It is located on the cabinet in the "telephone" room inside the lab.



5. Re-attach the filter and the panel. Plug in the projector and turn it on.
6. Press the **Menu** button on the projector.
7. Move down to **Advanced Menu**
8. Move down to **Options** and across to **Filter Time** (100+ Hz)



9. Point the remote control towards the front of the projector.
10. Once the FILTER TIME is highlighted HOLD the RESET button on the remote until a pop-up menu appears. (Cancel/Reset/etc.) (It may take a few seconds for the reset menu to pop up)
11. Use the UP arrow to move up to RESET and select it. It should then bring you back to the OPTION menu.
12. The FILTER TIME will say 0 Hz if you are successful in resetting the filter time.